

### 1.Overall accessories diagram




### 2.Number of accessories


	front*1	rear*1	left*1	right*1	Middle crossbar*8	
main body						注： with 2 holes*2 with 4 holes*4 with 6 holes*1 with 8 holes*1
annex	annex-1*6 	annex-2*6 	annex-3*6 	annex-4*6 	annex-5*6 	Front spotlight*2 
Screw	Black screw : M8*20 Hexagon socket screws*62 M8*25 Hexagon*12 M8 flat washer*70 M8 spring washer*12 M8 nut*34			Silver screw: M6 Hexagon socket screws*4 M6 flat washer*4 M6 spring washer*4		

### 3.Installation steps

3-1.Connect the corresponding letters and lock the screws

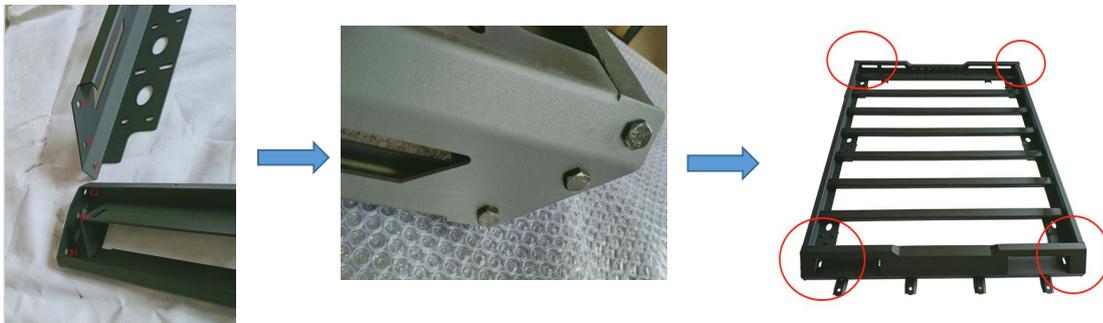



3-2.



3-3.



There are sponge pads on the back of the two places that need to be attached by the customer to

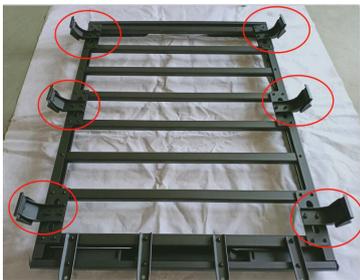

Note: This outer cover is only a flat-bottom installation effect. In actual installation, only the inner bracket needs to be installed. This outer cover is installed and locked after the luggage frame is assembled and moved to the roof of the

3-4.



3-5. Turn over the luggage frame after installation



3-6. Put the single row of small lights in from behind the front baffle, lock the screws on both sides



4. After the luggage frame is put on the roof, the installation is complete after installing the shell as shown in the figure



There need the customer to stick a sponge pad to prevent scratches (the sponge pad is included in the accessories)