



Jeep Wrangler JL/JT Roof Rack Installation Instructions



Butt joint of one side luggage rack cross bar (As figure 1 2 3). Another side cross bar should be installed after the middle crossbar is placed, then tighten screws (As figure 7)

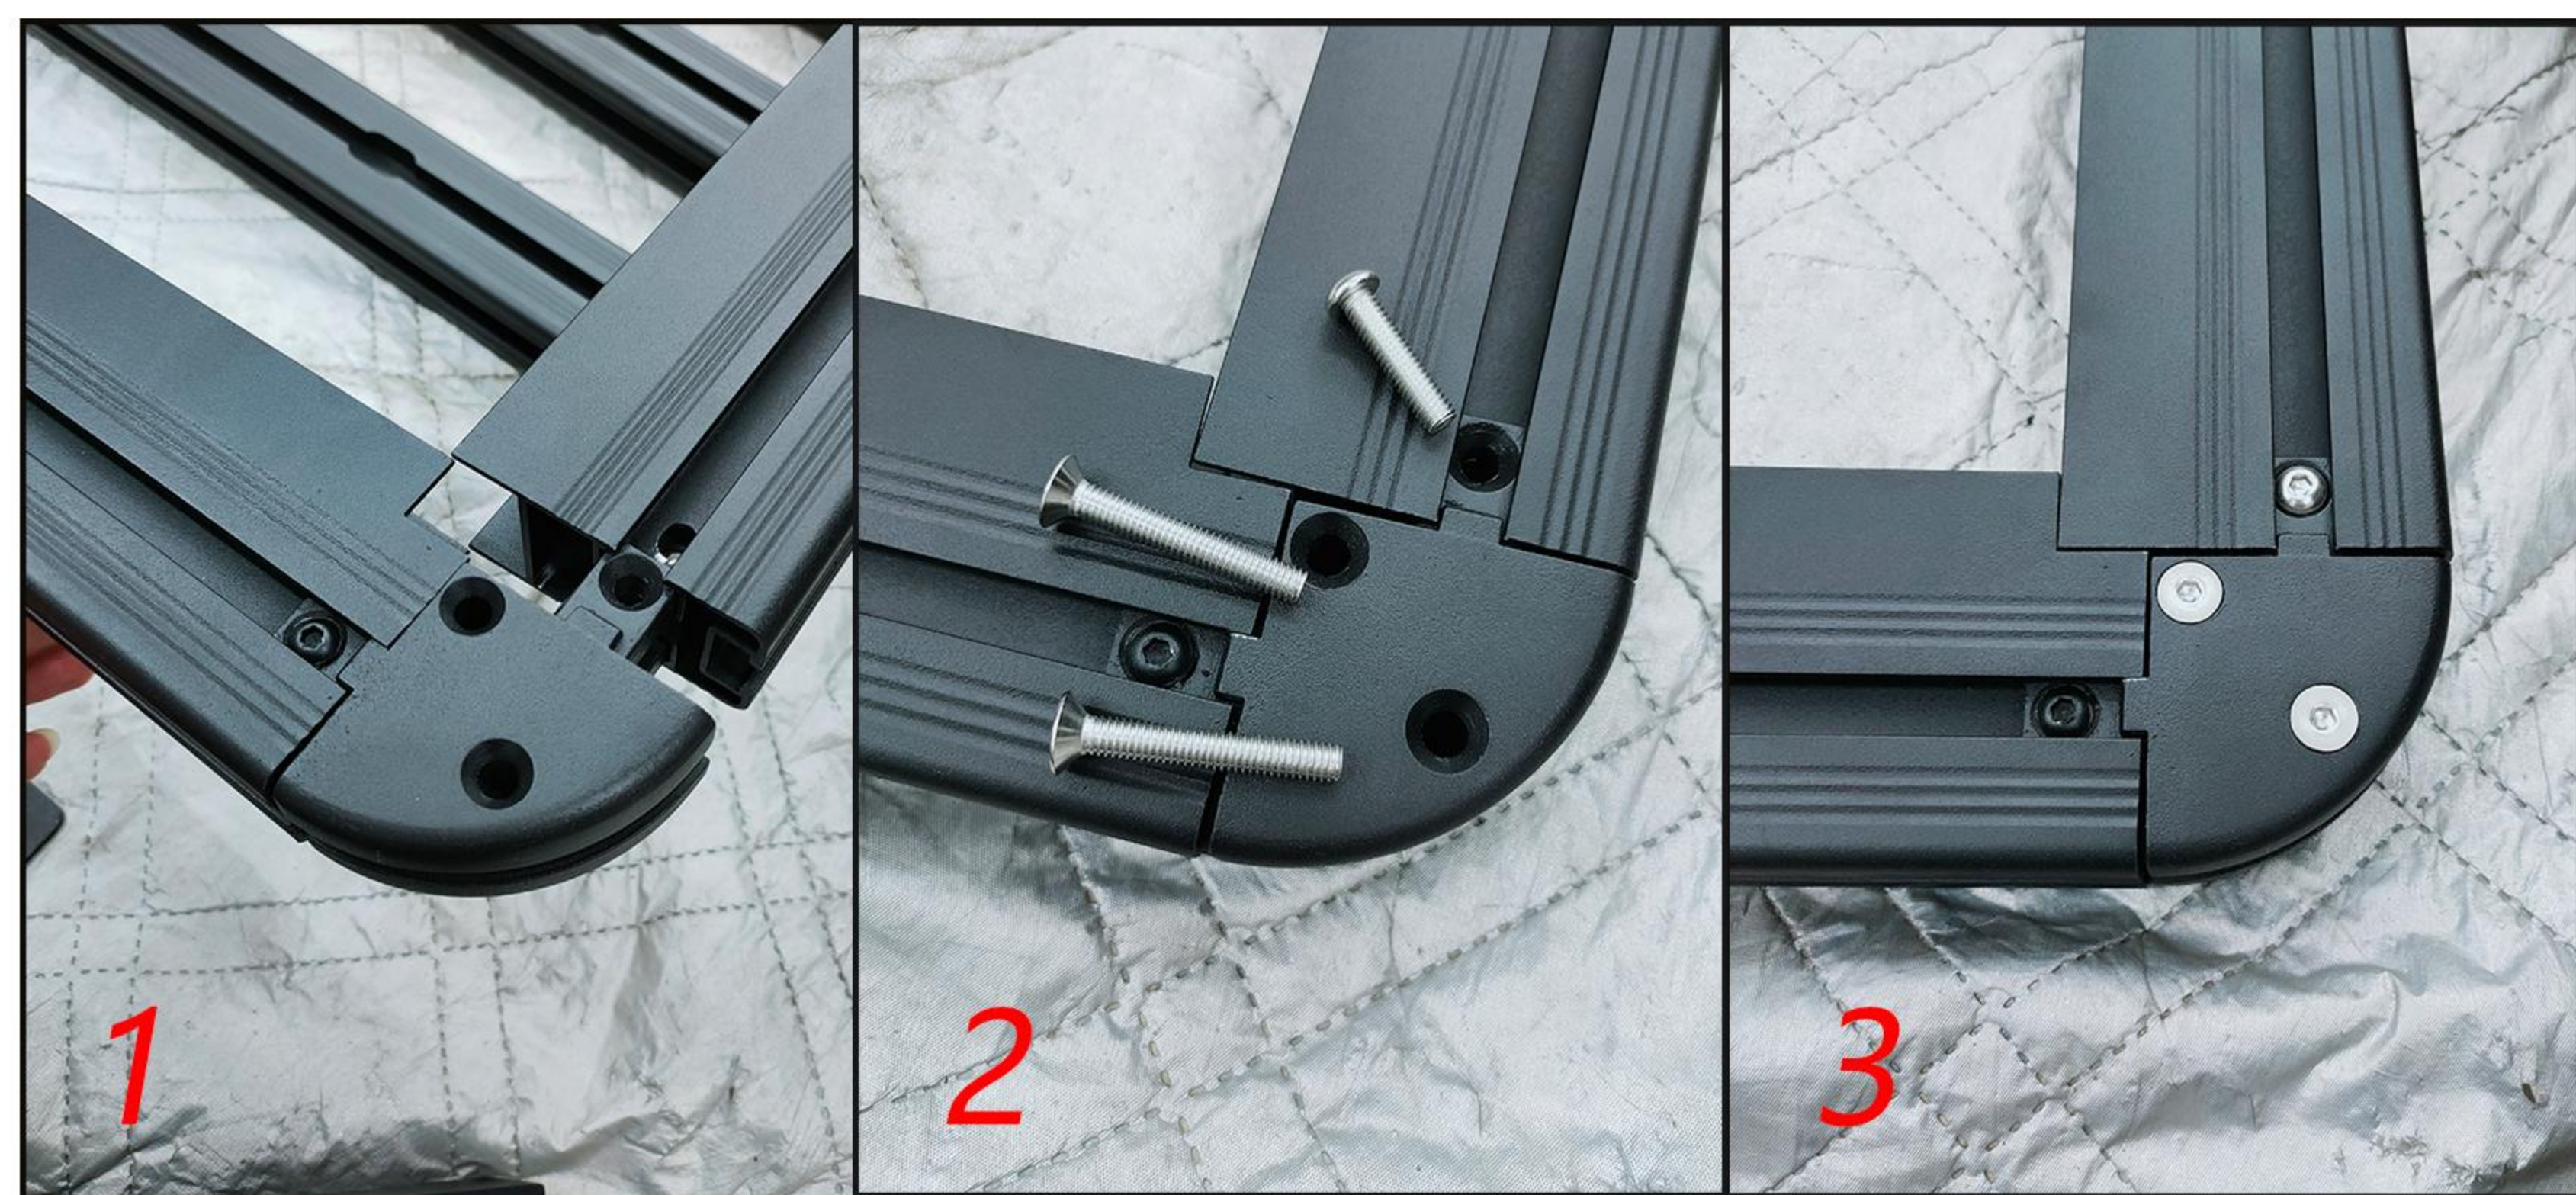

Put the nut into the groove (figure 4), use the screw (figure 5) and tighten (figure 7). Put nuts in the places circled in Figure 8, put 2 pieces in each place, total need to put 12 pieces

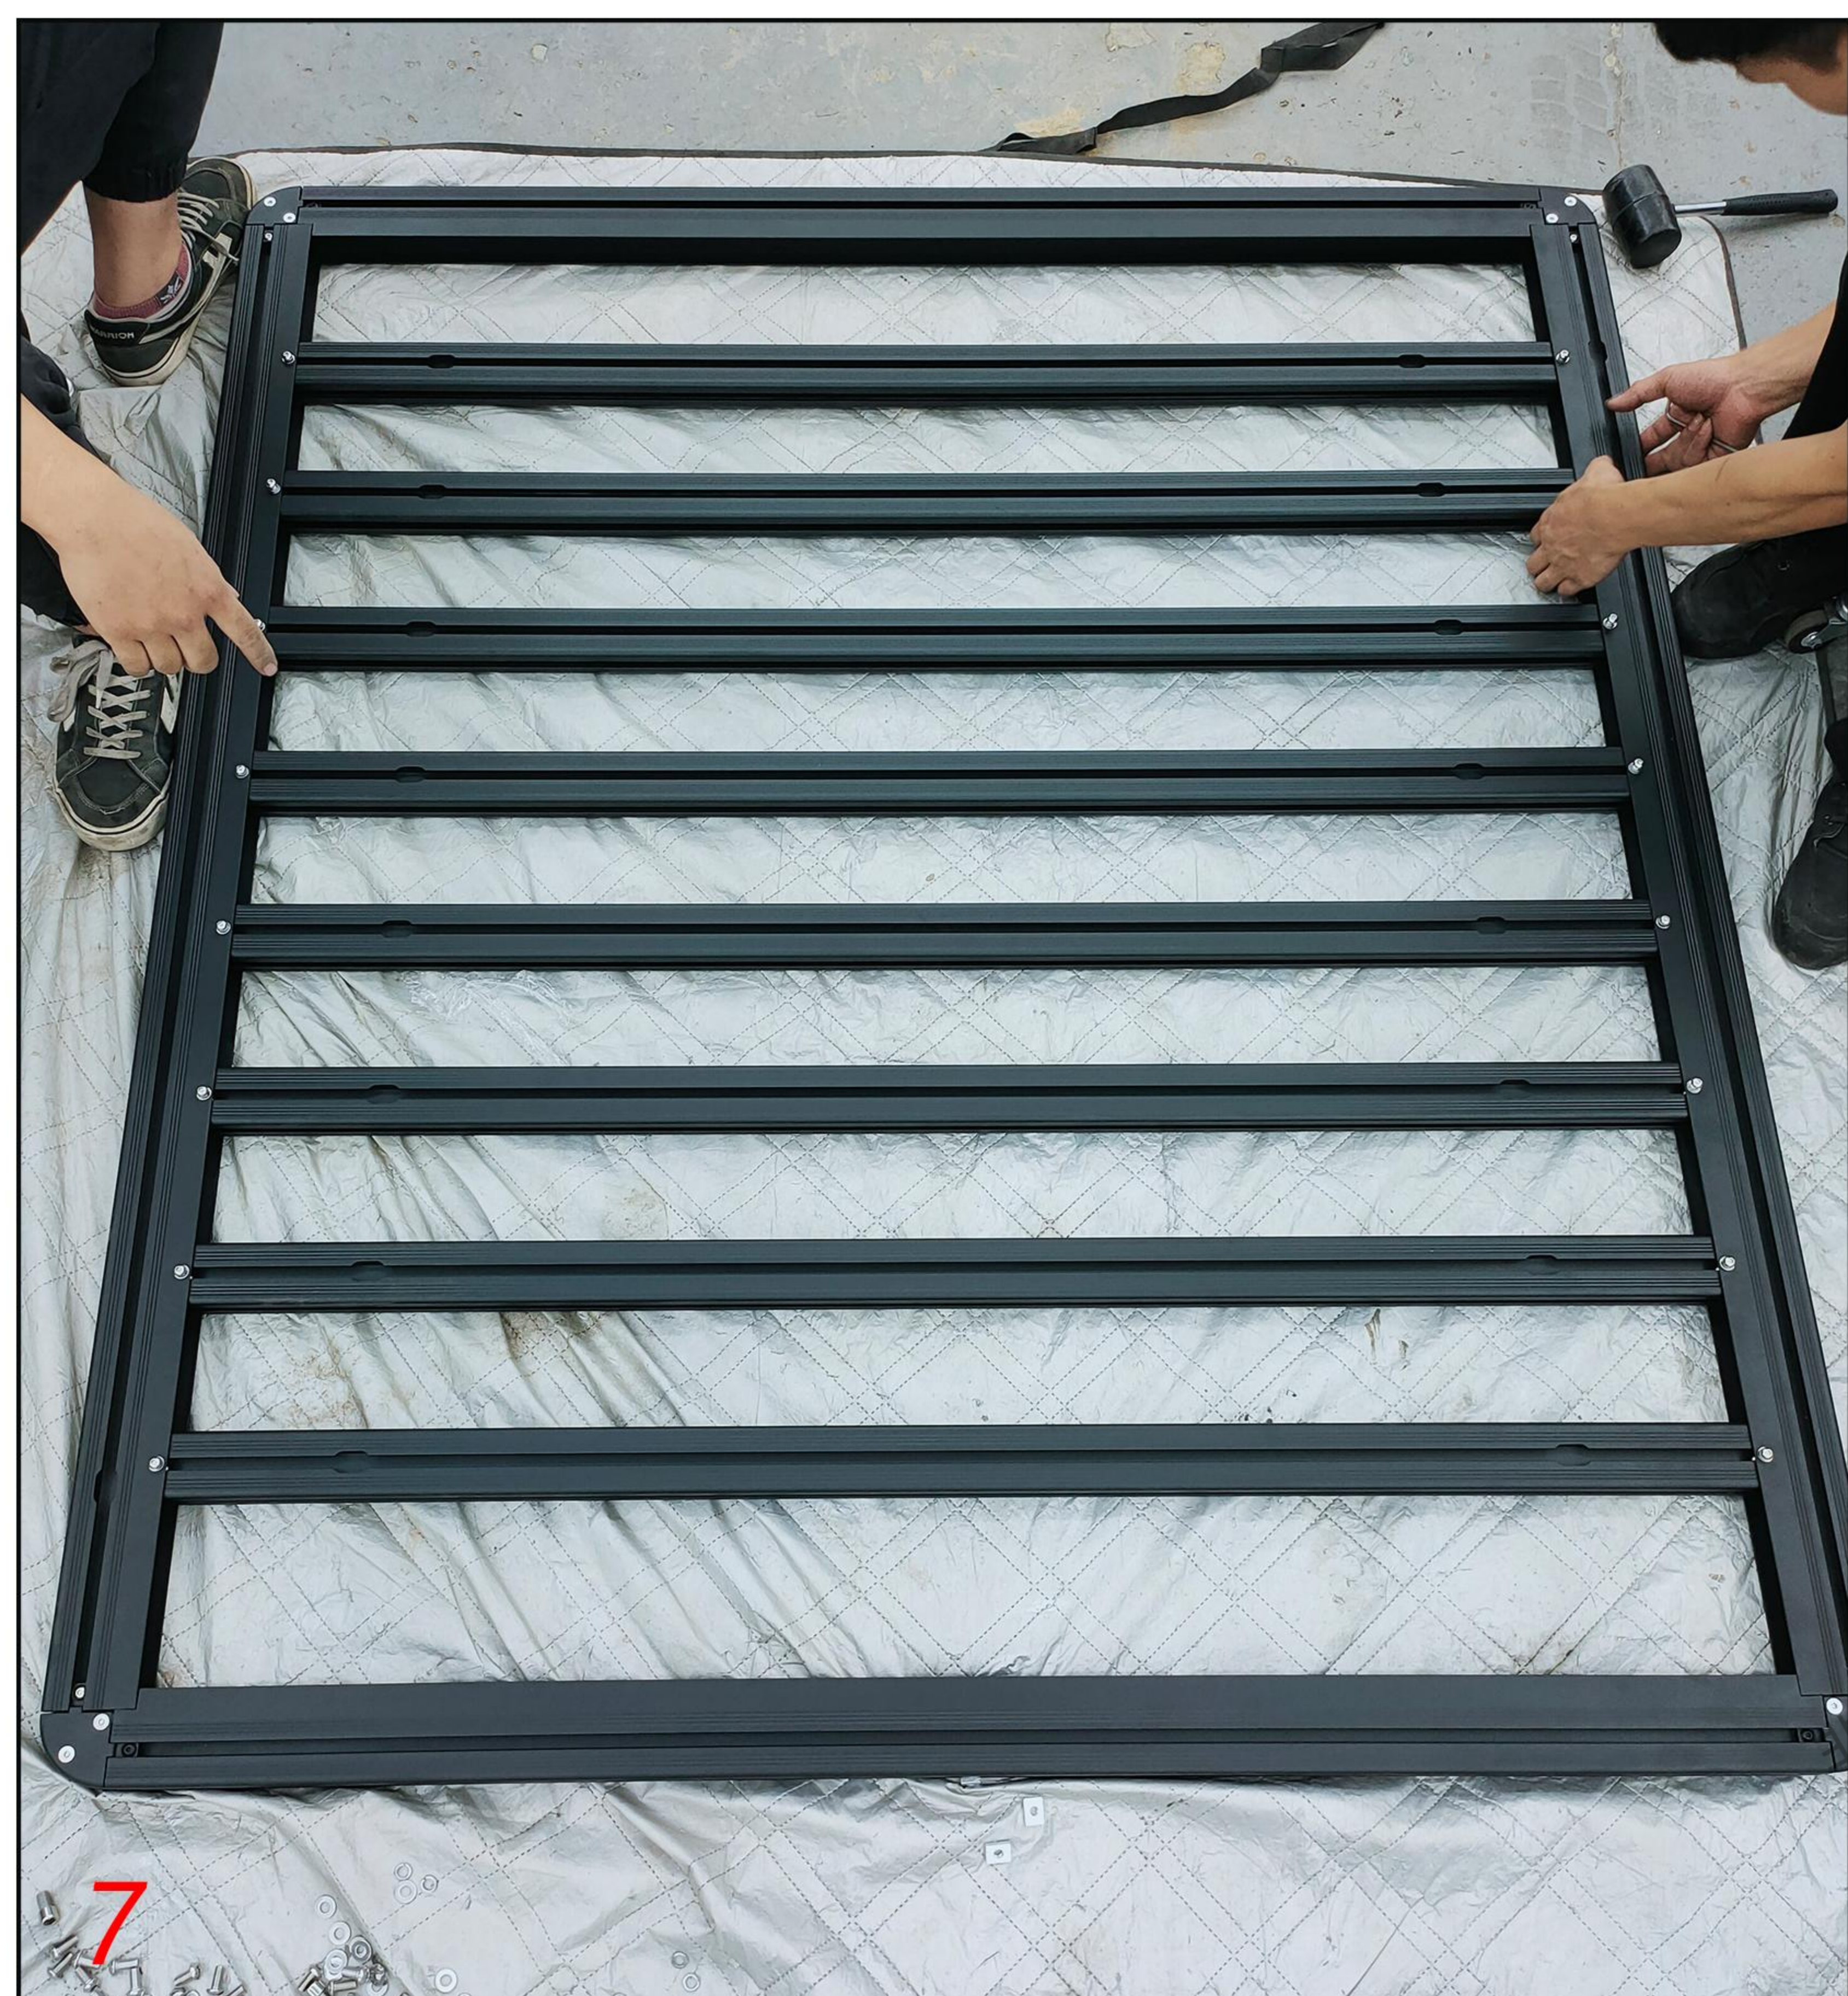

Assemble a bracket and tighten the screws, (note that the bracket should be aligned with the red line in Figure 11)



Place Six pieces nuts on the each side of cross bars (Figure 12). Tighten the screws (Figure 13), and install all the brackets (Figure 14)



Remove 6 piece of bracket cover (Figure 15), install the roof rack to your Jeep (Figure 16), then install the bracket back and tighten screws (Figure 18)

